
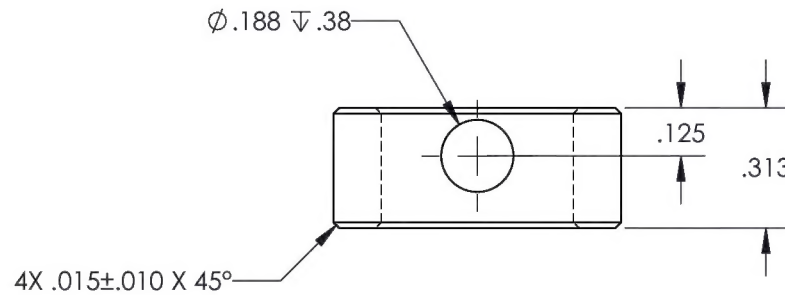




This drawing, specifications, and concepts contained here in are the sole property of Red Barn Machine, and may not be reproduced or used in any fashion without the prior written permission of Red Barn Machine.

REVISIONS				
REV	DESCRIPTION	DATE	INITIAL	APPROVED
4	AS DRAWN BY CANAM	8/24/2012	JAG	
5	ADDED +.005 / -.000 TOLERANCE ON DIM A	8/31/2012	JAG	
6	CH'D OUTSIDE DIAMETER TOLERANCE FROM Ø.749 +.000-.004.	10/22/2012	RJC	SE
7	CH'D CHAMFER FROM 4X .030 X 45° TO 4X .015 ±.010 X 45°.	7/24/2013	RJC	JG

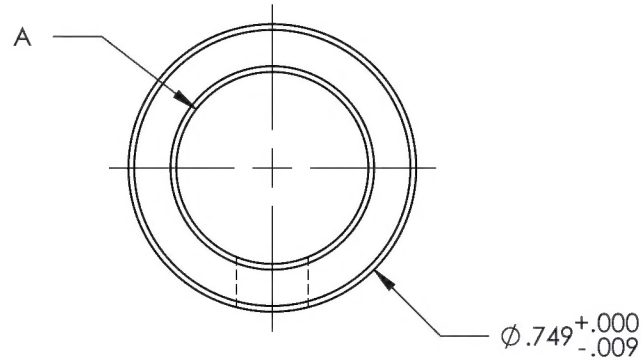

#### USAGE TABLE

PART #	DIM A +.005/-.000
SWA3-500	Ø.500
SWA3-500B	Ø.625

 <b>RED BARN MACHINE</b>	
<b>TITLE</b> CONTACT SPACER SWA3 SWIVEL	
<b>DWG NO.</b> SWA3-500	<b>REV</b> 7
<b>MAT'L</b> 6061-T6	<b>DRAWN BY:</b> CANAM
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES .XXX ± .005      FRACTIONS ± 1/32 .XX ± .01        ANGLES ± 5° .X ± .1	<b>APPROVED</b> <i>D Weil</i> <b>HEAT TREAT</b> FINISH      CLEAR ANODIZE <b>SPEC</b> MIL-A-8625F, TYPE II, CLASS I USED ON MODEL
1. BREAK ALL SHARP EDGES .015 x 45° OR .015R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING	
<b>SCALE</b> 2:1	<b>DATE</b> 7/16/1997 <b>SHEET 1 OF 1</b>